



STEP INTO STYLE

**INTENSE**

# INTENSE

Intense is an expression of the depth of the power of endurance that is the essence of this category. These 20 mm high performance tiles with special anti-skid properties are created to withstand the elements over time, to bring you a synthesis of durability and style across outdoor applications like gardens, swimming pools, outdoor decks, verandahs and more.

## CONSTONE COLLECTION

A part of the Intense Category, Constone Collection reflects a synergy of attributes drawn from the natural aesthetics of stone and the legendary robustness of concrete.

These 20mm tiles are created specially for those spaces where design concepts need to converge beauty with intrinsic strength to withstand the rigours of versatile functionality. This in its turn enables seamless flow of the aesthetic boundaries between interior and exterior flooring.

# Constone Collection

1

## Design

Constone reflects contemporary elegance while adding natural accents to outdoor spaces

4

## Inspirations

2 Cold and 2 Warm looks inspired by the primal perfection of stone and the strength of concrete

3

## Sizes

To bring alive your individual design concept and style sensibility

- 20 mm thickness tile



- Anti Skid Surface - R 11



- Load Bearing





# Constone Collection - 20 mm (Cold)

Verde



Available sizes:	No. of faces
60 x 60 cm	40
30 x 60 cm	80
30 x 30 cm	160

Grigio



Available sizes:	No. of faces
60 x 60 cm	40
30 x 60 cm	80
30 x 30 cm	160

# Constone Collection - 20 mm (Warm)

Crema



Available sizes:	No. of faces
60 x 60 cm	40
30 x 60 cm	80
30 x 30 cm	160

Rust



Available sizes:	No. of faces
60 x 60 cm	40
30 x 60 cm	80
30 x 30 cm	160

# Constone Collection - Faces

CONSTONE RUST

SIZE 600X600



# Applications



Adhesive




Grass



Gravel



Sand

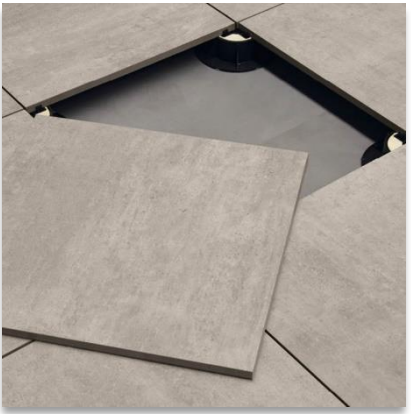

Raised Floor



# Cut Pcs Box



# Actual Box Packing



# Quality Standards

<b>ISPIRA QUALITY STANDARDS</b>				
Standards according to ISO 13006: Annex G - EN 14411: Annex G. Dry - Pressed Ceramic Tiles.				
<b>TECHNICAL FEATURES</b>	<b>STANDARD METHOD ISO</b>	<b>UNIT</b>	<b>REQUIREMENTS ISO 13006:2018(E) E<sub>v</sub> ≤0.5% GROUP BIa</b>	<b>ISPIRA VALUES</b>
MOHS HARDNESS OF SURFACE	ASTM C 1895-20	-	-	7
BREAKING STRENGTH	ISO 10545-4		Not less than 1300 N	Min. 10000 N
SURFACE ABRASION	ISO 10545 - 7	-	Report abrasion class and cycles passed	CLASS 4 (6000cycles)
SLIP RESISTANCE DCOF/R-Class	ANSI A137.1	-	DCOF > 0.42	DCOF > 0.65
	DIN 51130	-	Min. R-9	R-11
STAIN RESISTANCE	ISO 10545 - 14	Class	Minimum Class 3	CLASS 3
CHEMICAL RESISTANCE	ISO 10545 - 13	Class	Minimum B	Compliant

# Domestic Packing Details

Nominal Size	Thickness mm	Pcs. x box	Sq. mtr x box	Sq. ft x box	Weight x box (kg)
60 x 60	20	2	0.71	7.64	33
30 x 60	20	4	0.71	7.64	33
30 x 30	20	4	0.35	3.77	16

## Actual Size

Standard Size cm	Actual Size cm
60 x 60	59.6 x 59.6
30 x 60	29.6 x 59.6
30 x 30	29.6 x 29.6

\* We recommend to use 4mm spacer for all sizes.

Thank You